

e CATEYE is

ed to mak

/ WARNING!!! (Risk of death; Prevention of accidents)

PTE will continue to contribute to society by Cre-values in "Safety," "Health," and "Environment". EYE supports the Sustainable Development Goal ement proposed by the United Nations. ww.cateye.com/intl/company/sdgs/)

CATEYE SIII

- Do not look directly at the light source. In addition, when mounting the light unit, ensure that the light would not dazzle other road users.
- · To prevent accidents and to ensure safe riding, make sure the light is securely attached to the bracket and it is functioning properly without being unobstructed before the ride.
- · Always pay attention to the remaining battery power by checking the indicator periodically while using the light.
- · Do not disassemble or modify the light or any of the included items.

CAUTION! (Prevention of injury, damage, or property damage)

- Be sure to tighten the dial by hand. When you tighten it too hard with a tool, the screw thread may be stripped.
- · Check the dial and screw on the bracket periodically, and use them without any loosening.
- · Operating the light while riding is dangerous. Always ride safely.
- · Do not use Ultra Boost or High mode on public roads.
- · Note that the light becomes hot while illuminated. Do not block the lens or cover the light.
- · Due to the variability of LEDs, the color and brightness may differ even between devices with the same model number.
- · Keep device out of the reach of children.
- · Carrying a spare headlight is recommended in case the battery runs out.
- When used with a cyclocomputer, attach the headlight as far away from the cyclocomputer as possible, as it may affect measurement.

 This device is rated IPX4 based on JIS C0920. Do not immerse
- the device in water. Doing so may cause a malfunction. Wipe off any moisture after using the device in rainy weather.
- Do not subject the light to strong vibrations, impacts, or excessive force. Discontinue use if any abnormality occurs.
- Do not charge or use the battery at any voltage or polarity other than that specified. Do not short-circuit the battery.
- · Do not drop the light into a fire or heat the light.
- · If the light unit or parts become dirty with mud, etc., clean with a soft cloth moistened with mild soap. Never apply paint thinner, benzine or alcohol; damage will result.

ALITHIUM-ION BATTERIES

Recharge the battery for first time use or after long period of storage:

The voltage of the battery may drop due to self-discharge during long period of storage.

- Always fully charge the battery before use.
- If the device will not be used for a long period of time, store it in a location that is not too hot or too humid.
- Charge the battery for about 30 minutes every 6 months.

Cautions for charging and usage :

- Charging, discharging, and storing in high temperatures will cause the rechargeable battery to deteriorate faster. Do not place the light inside a vehicle or near a heater. Make sure to charge only when the ambient temperature is between 5 and 40°C.
- Please be sure that no dust or other foreign objects are attached to the plug of the USB cable before charging.
- Do not apply a load to the connector port by hanging the light unit during charging.
- Do not subject the light to vibrations while charging.
- Once charging is completed, be sure to disconnect the USB cable from the charging port.
- After charging is complete, securely attach the charging port cover to ensure waterproofing before riding.
- Charging and lighting times are approximate values, and will vary by environmental and user conditions.
- If the illumination time is significantly reduced even after proper charging, the rechargeable battery may be nearing the end of its service life.

Cautions for dispose:


When disposing the light unit, please do so in accordance with your local regulations.



Please prepare a USB cable (Type-C) that can be used for charging (sold separately) before using this product.

 \triangle Before using the product, refer to the "LITHIUM-ION BATTERIES" section and charge the battery.







Use a 2 A or higher USB battery charger. The unit may not charge properly if less than 2 A. * To ensure safety, do not charge the battery if the light unit is hot.



This device is equipped with a lock mode to prevent accidental operation. Lock mode is enabled by default. To release Lock mode, press and hold the switch for about 8 seconds.

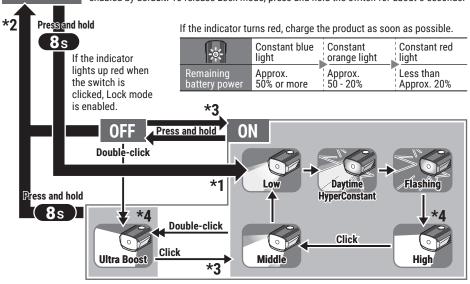

- *1 The indicator will flash after lighting up red when Lock mode is released. After the indicator stops flashing and Lock mode is disabled, Low mode will be enabled.
- While enabling Lock mode, the indicator will flash red and the light will flash temporarily. After the light stops flashing, Lock mode will be enabled.
- *3 When turning the light on, it lights up in the mode that was used last time. (Mode memory function)
- *4 A protection circuit will be activated if the light unit becomes too hot, and the brightness of the light will be reduced. This is not a malfunction. The light will return to the original brightness when the temperature cools to a safe level.

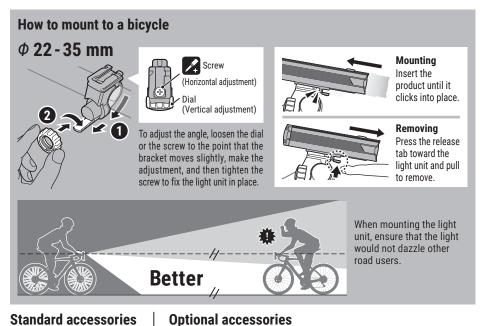

Standard accessories 5338827N 5340910

Bracket (H-34N FlexTight™) **Bracket Spacer** (H-37AL)



5342550 5341831N USB cable $(Type-A \leftrightarrow Type-C)$



Bracket (Helmet mount)

5342440 Bracket (CFB-100

Center fork)



1604110





Use only genuine components to prevent accidents and malfunctions.

SPECIFICATIONS

Light source LED x 1

Battery type Li-ion 3.6 V - 5000 mAh

Charge terminal USB TYPE-C

Operating time Ultra Boost : Approx. 1.25 hours

High I Approx. 1.75 hours
Middle I Approx. 3 hours
Low I Approx. 5 hours
Daytime HyperConstant Approx. 4 hours
Flashing I Approx. 60 hours
* Approximate average runtime at 68°F (20°C).

Charging time Approx. 4 hours (2 A)

Charge voltage 5 V

Temperature range Charging: 41°F - 104°F (5°C - 40°C) Operating: 14°F - 104°F (-10°C - 40°C)

Waterproof IPX4

 $\label{lem:continuous} Recharge / discharge number of times \\ Dimensions / Weight \\ About 300 times (until the rated capacity drops to 70%) \\ 1-22/32" x 4-39/64" x 1-37/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 4-39/64" x 1-37/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 4-39/64" x 1-37/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" x 1-37/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" x 1-37/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 g) \\ Recharge / discharge number of times \\ 1-22/32" x 1-39/64" (43.5 x 117 x 40 mm) / 7.53 oz (213.5 x 117 x 40 mm) / 7.53 oz (2$

* The specifications and design are subject to change without notice.

LIMITED WARRANTY

2-year Warranty: Light unit only (excludes battery deterioration)

CatEye products are warranted to be free of defects from materials and workmanship for a period of 2 years from original purchase. If the product fails to work during normal use, CatEye will repair or replace the defect at no charge. Service must be performed by CatEye or an authorized retailer. To return the product, pack it carefully and enclose the warranty certificate (proof of purchase) with instruction for repair. Please write or type your name and address clearly on the warranty certificate. Insurance, handling and transportation charges to CatEye shall be borne by person desiring service. For UK and REPUBLIC OF IRELAND consumers, please return to the place of purchase. This does not affect your statutory rights.

CAT EYE CO.,LTD.

2-8-25, KUWAZU, HIGASHI SUMIYOSHI-KU, OSAKA, JAPAN 546-0041 For inquiries, please visit https://cateye.com/intl/contact/

[For US Customers]

CATEYE AMERICA, INC.

Please visit https://www.cateyeamerica.com/contact-us/

Toll Free: 800.5.CATEYE