



# BATTERY HEADLIGHT

## VOLT25C™

HL-EL370G

Manual

~ K 1682



Before using the light, read this manual thoroughly and keep it for future reference.

Design Pat. Pending  
Copyright © 2019 CATEYE Co., Ltd.  
HLEL370G-191010 1



Light unit



FlexTight™ bracket (H-34N)

### ! WARNING!!!

- Be sure to direct the light beam downward so approaching car or pedestrian are not dazzled.
- Before your trip, please make sure the light is firmly mounted to the bracket and it lights up.
- Always pay attention to the remaining battery power by checking the battery indicator periodically while using the light.

### ! CAUTION!

- Keep the light away from children.
- Mounting the light unit too close to a wireless computer may adversely affect the reading of the computer.
- This product is water-resistant under normal daily use and can be used in the rain. However, do not intentionally submerge it in water.
- If the light unit or parts become dirty with mud, etc., clean with a soft cloth which is moistened with mild soap. Never apply paint thinner, benzene or alcohol; damage will result.

## SPARE/OPTIONAL PARTS


5338827N

FlexTight™ bracket (H-34N)



5341831N

Helmet mount




## SPECIFICATIONS

Light source	High-intensity LED x 1
Battery	Alkaline AAA batteries 1.5 V x 3
Operating time	High : Approx. 3 hours
	Low : Approx. 10 hours
	* Average runtime at 68°F (20°C).
Temperature range	14°F – 104°F (-10°C – 40°C)
Dimensions/weight	1-11/32" x 1-1/2" x 3-23/64" (34 x 38 x 85.5 mm) / 2.33 oz (66 g)

\* The specifications and design are subject to change without notice.

## 1 HOW TO REPLACE BATTERY

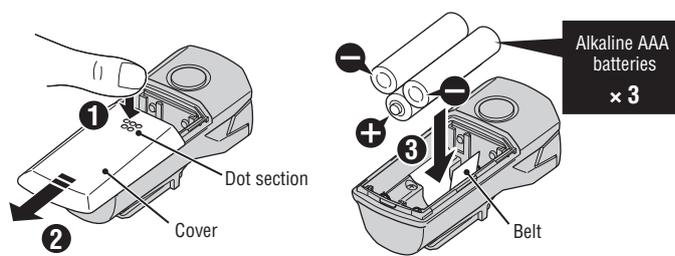


1. Slide the cover backward while pressing on the dot section (Fig.1 ①, ②).
2. Insert the batteries on top of the belt according to the orientation marked on the unit (③).
3. Reattach the cover by following the procedure in reverse.

### ! CAUTION!



- Do not use rechargeable batteries.
- Do not combine old and new batteries or batteries of different types.
- Ensure correct polarity when installing the batteries.
- Remove the batteries if the light will not be used for a long time. Failure to do so may result in malfunction due to battery fluid leakage.

### Removing the battery



## 2 HOW TO MOUNT TO A BICYCLE

Mounting height : 400 – 1200 mm

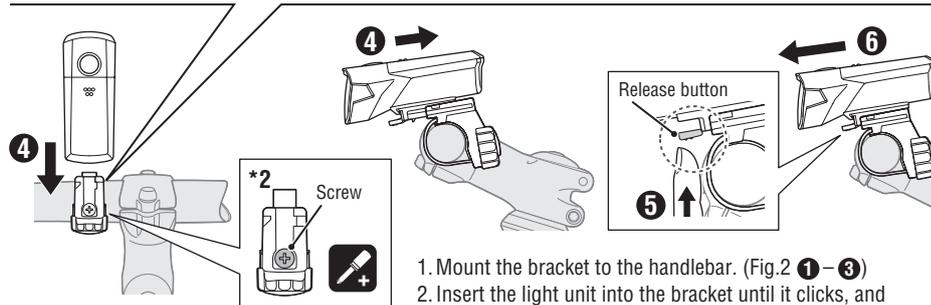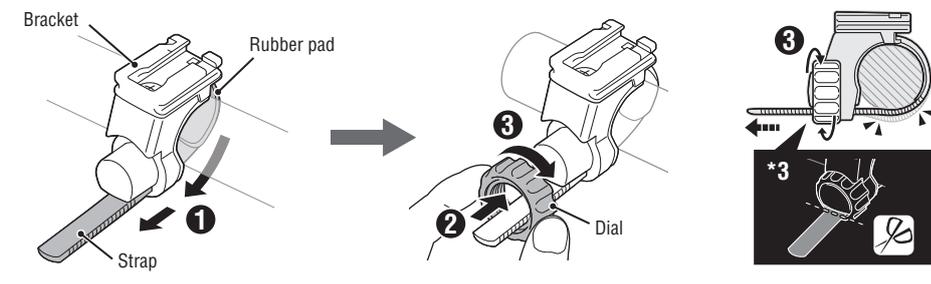


1. Mount the bracket to the handlebar. (Fig.2 ① – ③)
  2. Insert the light unit into the bracket until it clicks, and adjust the beam angle. (④) (\*1)
  3. To remove the light unit, pull it forward while pressing down on the release button (⑤, ⑥).
- \* To readjust the beam angle, loosen the dial and/or the screw enough to move the bracket, and firmly tighten them after adjustment. (\*2)

### ! CAUTION!


- Be sure to tighten the dial by hand.
- If tightened too hard with a tool, the screw thread may be stripped.
- Check the dial and screw (\*2) on the bracket periodically, to monitor for any loosening.
- If cutting the strap, be careful of injury from where the strap is cut. (\*3)

## 3 SWITCH OPERATION

Switch (Battery indicator)

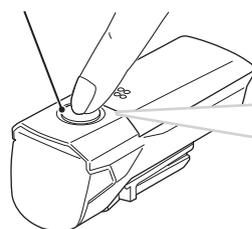

OFF ← ON \*4 Switch : Press and hold

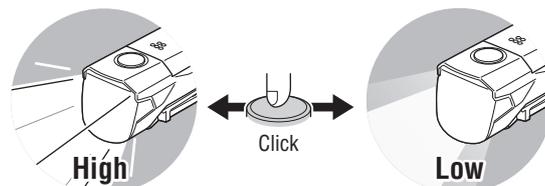

\*4: When turning the light on, it lights up in the mode that was used last time. (Mode memory function)

### Remaining battery capacity:

When the switch (battery indicator) is illuminated in red, there is little remaining battery power. Replace the battery as soon as possible.



Indicator (Constant red light)

## LIMITED WARRANTY

### 2-year Warranty: Light unit only

CatEye products are warranted to be free of defects from materials and workmanship for a period of 2 years from original purchase. If the product fails to work during normal use, CatEye will repair or replace the defect at no charge. Service must be performed by CatEye or an authorized retailer. To return the product, pack it carefully and enclose the warranty certificate (proof of purchase) with instruction for repair. Please write or type your name and address clearly on the warranty certificate. Insurance, handling and transportation charges to CatEye shall be borne by person desiring service.

### CATEYE CO.,LTD.

2-8-25, Kuwazu, Higashi Sumiyoshi-ku, Osaka 546-0041 Japan  
Attn: CATEYE Customer Service Section  
Phone : (06)6719-6863 Fax : (06)6719-6033  
E-mail : support@cateye.co.jp URL : <https://www.cateye.com>