



ENG

DUPLEX

SL-LD400

Manual

Before using the light, read this manual thoroughly and keep it for future reference.

Design Pat. Pending
Copyright © 2017 CATEYE Co., Ltd.
SLLD400-170316 1



⚠ WARNING!!!

Check periodically to ensure that the light unit is attached securely.
Do not use a damaged rubber band.

⚠ CAUTION!

- Stop your bicycle to operate the switch.
- Keep the light away from children.
- Do not use in combination with new and old batteries, or different types of batteries.
- Be sure to install batteries in the correct direction.
- Remove and store batteries when you will not use the light for a long period of time. Otherwise, batteries may leak liquid, which may result in failure.
- This unit is not totally waterproof. Please wipe and dry it completely after using in rain. Otherwise, it may cause failure.
- If the light unit or parts become dirty with mud, etc., clean with a soft cloth which is moistened with mild soap. Never apply paint thinner, benzine or alcohol; damage will result.

SPECIFICATIONS

Battery : AAA dry-cell battery x 2
 Temperature range : 14°F – 104°F (-10°C – 40°C)
 Dimensions/weight : 2-25/32" x 1-1/8" x 29/32"
 (70.5 x 28.5 x 23 mm) / 1.82 oz
 (51.5 g) (Including batteries and rubber band)

* The specifications and design are subject to change without notice.


LIMITED WARRANTY

2-year Warranty: Light unit only


CatEye products are warranted to be free of defects from materials and workmanship for a period of 2 years from original purchase. If the product fails to work during normal use, CatEye will repair or replace the defect at no charge. Service must be performed by CatEye or an authorized retailer. To return the product, pack it carefully and enclose the warranty certificate (proof of purchase) with instruction for repair. Please write or type your name and address clearly on the warranty certificate. Insurance, handling and transportation charges to CatEye shall be borne by person desiring service.

For UK and REPUBLIC OF IRELAND consumers, please return to the place of purchase. This does not affect your statutory rights.

Please register your CatEye product on the website.
<http://www.cateye.com/en/support/regist/>




Light unit




AAA alkaline batteries

1 HOW TO INSTALL BATTERY

Use a coin to pull out the inner unit. Install batteries according to the marks on the inner unit, and put back the unit in the light body securely.


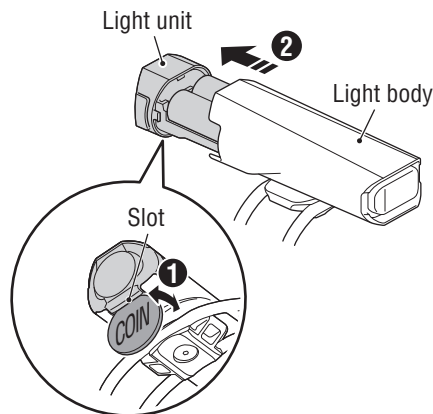


How to remove batteries

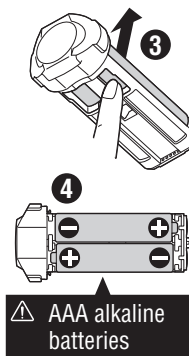


2 HOW TO MOUNT

Attach securely in the mounting position.

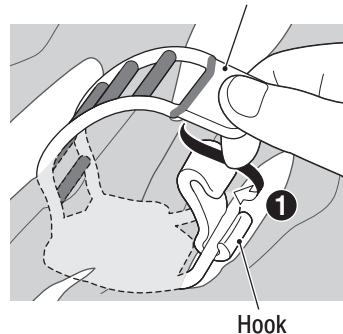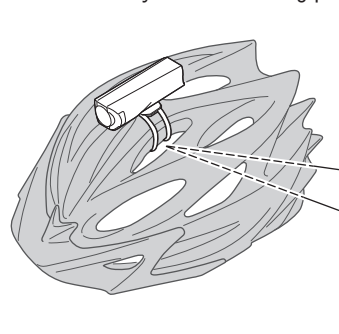

This light rotates 360 degrees to adjust angle.

3 SWITCH OPERATION

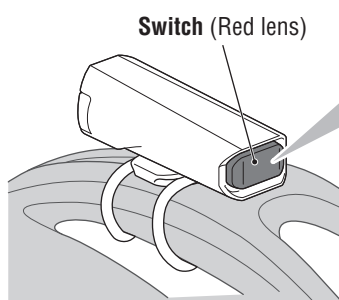

OFF



ON

FRONT Flashing	REAR Flashing	Approx. 100 h
----------------	---------------	---------------

FRONT Constant	REAR Flashing	Approx. 100 h
----------------	---------------	---------------


FRONT Constant	REAR Flashing	Approx. 100 h
----------------	---------------	---------------

* Lighting times are approximate values, and will vary by environmental and user conditions.

SPARE PARTS

5342990

Rubber band and hook (LONG)



CATEYE CO., LTD.

2-8-25, Kuwazu, Higashi Sumiyoshi-ku, Osaka 546-0041 Japan
 Attn: CATEYE Customer Service Section
 Phone : (06)6719-6863
 Fax : (06)6719-6033
 E-mail : support@cateye.co.jp
 URL : <http://www.cateye.com>

[For US Customers]

CATEYE AMERICA, INC.
 2825 Wilderness Place Suite 1200, Boulder CO
 80301-5494 USA
 Phone : 303.443.4595
 Toll Free : 800.5.CATEYE
 Fax : 303.473.0006
 E-mail : service@cateye.com