

### MARNING!!! (Risk of death; Prevention of accidents)

- To prevent accidents and to ensure safe riding, make sure the light is securely attached to the bracket and it is functioning properly before the ride. Do not use a damaged ladder rubber band.
- · Always pay attention to the remaining battery power by checking the indicator periodically when using.
- · Do not disassemble or modify the light or any of the included items

### CAUTION! (Prevention of injury, damage, or property damage)

- · Stop your bicycle to operate the switch.
- Do not place it within children's reach.
- This device is rated IPX4 based on JIS C0920. Do not immerse the device in water. Doing so may cause a malfunction. Wipe off any moisture after using the device in rainy weather.
- Do not subject the light to strong vibrations, impacts, or excessive force. Discontinue use if any abnormality occurs.
- · Do not charge or use the battery at any voltage or polarity other than that specified. Do not short-circuit the battery.
- · Do not drop the light into a fire or heat the light.
- · If the light unit or parts become dirty with mud, etc., clean with a soft cloth which is moistened with mild soap. Never apply paint thinner, benzine or alcohol; damage will result.

### ⚠ LITHIUM-ION BATTERIES

#### Recharge the battery for first time use or after long period of storage:

The voltage of the battery may drop due to self-discharge during long period of storage. Always fully charge the battery before use.

### Cautions for charging and usage:

- · We recommend using 0.5 A USB battery charger.
- · Please be sure that no dust or other foreign objects are attached to the plug of the USB cable before charging.
- · Do not subject the light to vibrations while charging.
- · When your PC is in sleep state, the unit cannot be charged.
- Once charging is completed, be sure to disconnect the USB cable from the charging port.
- Charging time is approximate values, and will vary depending on the environmental and usage conditions.
- · Charging, discharging, and storing in high temperatures will cause the rechargeable battery to deteriorate faster. Do not place the light inside a vehicle or near a heater. Make sure to charge only when the ambient temperature is between 5 and 40°C.
- · If the illumination time is significantly reduced even after proper charging, the rechargeable battery may be nearing the end of its service life.

#### Cautions on storage:

- If the device will not be used for a long period of time, store it in a location that is not too hot or too humid.
- · Charge the battery for about 30 minutes every 6 months. Cautions for dispose:

When disposing the light unit, please do so in accordance with your local regulations.

### Included Items







**Bracket** (SP-15)



Ladder rubber band





Bracket rubber pad



USB cable (MICRO USB)

### **HOW TO CHARGE**






Standard charging time

Approx. 3 hours (0.5 A)

- Always charge the product before use.
- Attach the charging port cover securely to ensure waterproofness.

### **SWITCH OPERATION**

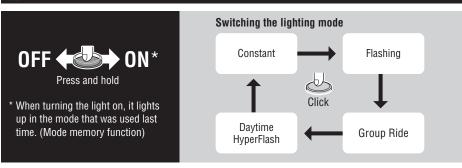


### Automatic battery-saving function:

When the remaining battery power gets low, the indicator starts flashing and the lighting mode changes to power-save flashing mode (where the LEDs on both ends of the unit flash alternately). Charge the product as soon as possible.


Run time is approximately 1 hour in power-save flashing mode.

## **HOW TO MOUNT TO A BICYCLE**


Attach the light securely in the mounting position.



Attach the ladder rubber band (B) to the bracket (A).



Mount the light unit vertically or horizontally.




Attach the bracket rubber pad (C) aligning it with the protrusion on the back of the bracket (A).








\* The light can be mounted on aero seat posts with an outer circumference of approx. 130 mm.



Fold back any excess band and hook it on the tab.



Insert the tip of the band into the gap.

### **SPECIFICATIONS**

Battery	Li-ion 3.7 V 500 mAh
Operating time	
Constant	Approx. 5 hours
• Flashing	Approx. 70 hours
Group Ride	Approx. 11 hours
Daytime HyperFlash	Approx. 15 hours
Standard charging time	Approx. 3 hours (0.5 A)
Charge voltage	5V
Temperature range	
• Charging	41°F – 104°F (5°C – 40°C)
Operating	14°F – 104°F (-10°C – 40°C)
Waterproof	IPX4
Recharge/discharge number of times	About 300 times (until the rated capacity
	drops to 70%)
Dimensions / Weight	2-29/64"x 53/64"x 1-9/32"(62.5 x 21.0 x 32.5
	mm) / 0.95 oz (27 g)

<sup>\*</sup> The specifications and design are subject to change without notice.

### Standard accessories



Bracket (SP-15)

### 5342730



USB cable (MICRO USB)

### **Optional accessories**

### 5342460



### **LIMITED WARRANTY**

# 2-year Warranty: Light unit only (excludes battery deterioration)

CatEye products are warranted to be free of defects from materials and workmanship for a period of 2 years from original purchase. If the product fails to work during normal use, CatEye will repair or replace the defect at no charge. Service must be performed by CatEye or an authorized retailer. To return the product, pack it carefully and enclose the warranty certificate (proof of purchase) with instruction for repair. Please write or type your name and address clearly on the warranty certificate. Insurance, handling and transportation charges to CatEye shall be borne by person desiring service.

For UK and REPUBLIC OF IRELAND consumers, please return to the place of purchase. This does not affect your statutory rights.

### CAT EYE CO., LTD.

2-8-25, KUWAZU, HIGASHI SUMIYOSHI-KU, OSAKA, JAPAN 546-0041For inquiries, please visit https://cateye.com/intl/contact/

#### [For US Customers]

Please visit https://www.cateyeamerica.com/contact-us/

Toll Free: 800.5.CATEYE