



CATEYE STRADA CYCLOCOMPUTER CC-RD100

ENG




U.S. Pat. Nos. 5236759/6957926 Pat./Design Pat. Pending
Copyright © 2006 CATEYE Co., Ltd.
CCRD10-061114 [066600501] 3

WARNING / CAUTION


- Do not concentrate on the computer while riding. Ride safely!
- Install the magnet, sensor, and bracket securely. Check these periodically.
- If a child swallows a battery, consult a doctor immediately.
- Avoid having the computer in direct sunlight for unnecessary or extended periods.
- Do not disassemble the computer.
- Do not drop the computer. Doing so may result in a computer malfunction or damage.
- When using the computer installed on the bracket, change the **MODE** by pressing on the three dots below the screen. Pressing hard on other areas can result in malfunction or damage to the computer.
- Never place the computer on a metal surface. If you do, the contact points will conduct electricity, discharging the battery.
- Tighten the dial on the Flex-Tight bracket by hand only. Over-tightening can damage the bracket threads.
- When cleaning the computer, bracket and sensor, do not use thinners, benzene, or alcohol.
- Dispose of used batteries according to local regulations.
- LCD screen may be distorted when viewed through polarized sunglass lenses.

Preparing the computer

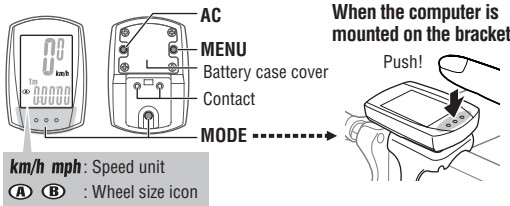


1 Clear all data (initialization)

Press the AC button on the back.



2 Select the desired speed units

Select "km/h" or "mph".



3 Enter the tire circumference


Enter the tire circumference of your bicycle in mm.

* Refer to the tire circumference reference table.



4 Set the clock

When **MODE** is pressed and held, "Displayed time", "Hour", and "Minute" will appear, in this order.



Tire circumference reference table


Tire size	L (mm)
12 x 1.75	935
14 x 1.50	1020
14 x 1.75	1055
16 x 1.50	1185
16 x 1.75	1195
18 x 1.50	1340
18 x 1.75	1350
20 x 1.75	1515
20 x 1.9	1615
22 x 1-3/8	1770
22 x 1-1/2	1785
24 x 1	1753
24 x 3/4 Tubular	1785
24 x 1-1/8	1795
24 x 1-1/4	1905
24 x 1.75	1890
24 x 2.00	1925
24 x 2.125	1965
26 x 7/8	1920
26 x 1(59)	1913
26 x 1(65)	1952
26 x 1.25	1953
26 x 1-1/8	1970
26 x 1-3/8	2068
26 x 1-1/2	2100
26 x 1.40	2005
26 x 1.50	2010
26 x 1.75	2023
26 x 1.95	2050
26 x 2.00	2055
26 x 2.10	2068
26 x 2.125	2070
26 x 2.35	2083
26 x 3.00	2170
27 x 1	2145
27 x 1-1/8	2155
27 x 1-1/4	2161
27 x 1-3/8	2169
650 x 20C	1938
650 x 23C	1944
650 x 35A	2090
650 x 38A	2125
650 x 38B	2105
700 x 18C	2070
700 x 19C	2080
700 x 20C	2086
700 x 23C	2096
700 x 25C	2105
700 x 28C	2136
700 x 30C	2146
700 x 32C	2155
700C Tubular	2130
700 x 35C	2168
700 x 38C	2180
700 x 40C	2200
29 x 2.1	2288
29 x 2.3	2326

Measure wheel circumference (L) of your bike

To get the most accurate calibration do a wheel roll out. With the valve stem perpendicular to the ground, mark the pavement at the valve stem. With the riders weight on the bike, roll the wheel one tire revolution in a straight line and mark the ground when the valve stem is perpendicular to the ground again. Measure the distance in millimeters. This is the most accurate wheel calibration number.






How to install the unit on your bicycle



- Bracket band
- Bracket
- Sensor
- Magnet
- Sensor rubber band (x2)
- Sensor hook
- Sensor rubber pad (x3)
- Bracket rubber pad
- Nylon ties (x5)




1 Attach the bracket to the stem or handlebar

When attaching the bracket to the stem



Caution:
Tighten the bracket, ensuring that the cable does not get caught in the stem.



When attaching the bracket to the handlebar



Caution:
Tighten the bracket, ensuring that the cable does not get caught in the handlebar.

2 Wrap the cable around the front brake cable

Caution:
Turn the handlebar to make sure wire does not hinder full rotation.





Caution:
Round off the cut edge of the bracket band to prevent injury.

Install the sensor and magnet :




A The magnet should pass through the sensor line.

B The clearance between the sensor surface and the magnet must not exceed 5mm.

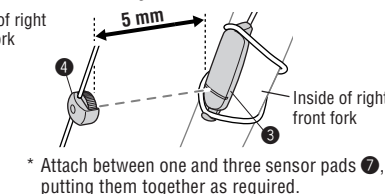



* Attach between one and three sensor pads (7), putting them together as required.

3 Install the sensor






* You can also use ties (9) (in place of sensor rubber band (5)) to secure the sensor.

4 Install the magnet



5 Remove/install the computer



* After installation, rotate the front wheel gently to check that the speed is displayed on the computer. If the speed is not displayed, check that conditions **A** and **B** are satisfied.

Operating the computer [Measuring screen]

Tm Elapsed Time
0:00'00" - 9:59'59"

Dst Trip Distance
0.00 - 999.99 km [mile]

Dst² Trip Distance-2
0.00 - 999.99 /
1000.0 - 9999.9 km [mile]

Av Average Speed²
0.0 - 200.0 km/h
[0.0 - 125.0 mph]

Mx Maximum Speed
0.0(4.0) - 200.0 km/h
[0.0(3.0) - 125.0 mph]

Odo Total Distance
0.0 - 9999.9 /
10000 - 99999 km [mile]

Clock
0:00 - 23:59
or 1:00 - 12:59

Pace arrow
Indicates whether the current speed is faster (▲) or slower (▼) than the average speed.

Current speed
0.0(4.0) - 200.0 km
[0.0(3.0) - 125.0 mph]

Selected Mode

Starting/Stopping measurement

Measurements occur automatically when the bicycle is in use. During measurement, **km/h** or **mph** flashes.

Switching computer function

Pressing **MODE** switches function, in order, as shown on the left.

Resetting data

To reset measurement data, display any data other than for **Dst-2** and then press and hold **MODE**. Pressing and holding **MODE** with **Dst-2** displayed resets **Dst-2** only. The total distance is never reset.

Power-saving function

If the computer has not received any signal for an hour, power-saving mode will activate and only the clock will be displayed. Alternatively, if the sensor detects a signal or **MODE** is pressed, the main display reappears.

- *1 With the computer installed on the bracket, press on the three raised dots on the face of the computer.
- *2 If **Tm** exceeds approximately 27 hours or **Dst** exceeds 999.99 km, .E (Error) is displayed as the average speed. Reset data.

Changing the computer settings [menu screen]

To bring up the menu screen, press **MENU** in any mode. Each time **MODE** is pressed, the relevant menu screen appears. Pressing and holding **MODE** changes the setting of the displayed menu.

Wheel selection Wheel size entry Clock setting Total distance manual entry Speed unit

- Setting change (by pressing & holding) **MODE**
- * After changing, be sure to press **MENU** to register the setting.
 - * If the menu screen is not touched for a minute, the Measuring screen reappears without data changes.

- Wheel selection** Toggle between the specified wheel size (tire circumference) **A** and **B**. Use this function if the computer is to be shared between two bicycles. Pressing **MODE** toggles between **A** and **B**.
- Wheel size entry** Pressing **MODE** increases the value, and pressing and holding **MODE** moves to the next digit.
* To enter the wheel size **B**, display **B** using "Wheel selection".
- Clock setting** To set the clock, refer to "Preparing the computer-4".
- Total distance manual entry**
..... Before reinitializing the computer, note the total distance. This reading will later allow you to enter the total distance manually. Pressing **MODE** increases the value, and pressing and holding **MODE** moves to the next digit.
- Speed unit** Pressing **MODE** toggles between **km/h** and **mph**.

Maintenance


To clean the computer or accessories, use diluted neutral detergent on a soft cloth, and wipe it off with a dry cloth.

Replacing the battery

If the display appears faded, replace the battery. Install a new lithium battery (CR1620) with the (+) side facing upward. Then reinitialize the computer referring to "Preparing the computer".

Caution: When closing the battery case cover, make sure that the rubber packing is properly seated to ensure that a waterproof seal is maintained.

* A precision screwdriver is required to replace the battery.



Troubleshooting

MODE does not work when the computer is mounted on its bracket.

Check that there is no dirt between the bracket and the computer.

Wash off the bracket with water to get rid of any dirt, and to ensure that the computer slides in and out smoothly.

Speed and distance are not displayed. (Touch a metal item against two contact points of the computer several times to create a short circuit while observing the display. If a numeric value appears, this signifies that the computer is functioning normally.)

Is the clearance between the sensor and magnet too great? (must be ≤ 5 mm)

Does the magnet pass through the sensor line?

Adjust the positions of the magnet and sensor.

Is there any foreign matter (which would prevent a clean contact) on the contact points of the computer and/or bracket?

Clean the contact points.

Check that no wire cable is worn or broken. Even with a normal appearance, it may be that a wire cable could be broken internally.

Replace the bracket sensor set.

No display.

Is battery in the computer run down?

Replace it. Then reinitialize the computer referring to "Preparing the computer".

Incorrect data appear.

Reinitialize the computer referring to "Preparing the computer".

Specification

Battery	Lithium battery (CR1620) x 1
Battery life	Approx. 3 years (Using the battery one hour a day; the battery life will vary with the conditions of use.)
Controller	4-bit, 1-chip microcomputer (Crystal controlled oscillator)
Display	Liquid crystal display
Sensor	No contact magnetic sensor
Wheel circumference range	0100 mm - 3999 mm (Default figure A: 2096 mm, B: 2096 mm)
Working temperature	32 °F - 104 °F (0 °C - 40 °C) (This product will not function appropriately when exceeding the Working Temperature range. Slow response or black LCD at lower or higher temperature may happen respectively.)
Dimensions/weight	1-53/64" x 1-7/32" x 19/32" (46.5 x 31 x 15 mm) / 0.63 oz (18 g)

* The factory-loaded battery life might be shorter than the above-mentioned specification.
* The specifications and design are subject to change without notice.

Standard Parts

LIMITED WARRANTY

2-Year Computer only

(Accessories/Bracket sensor and Battery Consumption excluded)

CatEye cycle computers are warranted to be free of defects from materials and workmanship for a period of two years from original purchase. If the product fails to work due to normal use, CatEye will repair or replace the defect at no charge. Service must be performed by CatEye or an authorized retailer.

To return the product, pack it carefully and enclose the warranty certificate (proof or purchase) with instruction for repair. Please write or type your name and address clearly on the warranty certificate.

Insurance, handling and transportation charges to CatEye shall be borne by person desiring service.

For UK and REPUBLIC OF IRELAND consumers, please return to the place of purchase. This does not affect your statutory rights.

CATEYE CO., LTD.

2-8-25, Kuwazu, Higashi Sumiyoshi-ku, Osaka 546-0041 Japan

Attn: CATEYE Customer Service Section

Service & Research Address for USA

CATEYE Service and Research Center

1705 14th St. 115 Boulder, CO 80302

Phone: 303.443.4595

Toll Free: 800.5CATEYE

Fax: 303.473.0006

E-mail: service@cat-eye.com

URL: http://www.cat-eye.com